

Lantech®

Q-300XT

Simple Automation™
Stretch Wrapping System

Productivity
Automation in a Semi-automatic
stretch wrapping environment.

Simple Automation

- Automatic film cut & clamp
- Eliminates wasted operator time getting on and off the fork truck
- Reduces risk of injuries
- Fully protected mechanical cut & clamp



Q-300XT

*Shown with Click-n-Go
Remote Control option.




Unlimited cycles
No exclusions

More Lantech field-tested packaging solutions @ www.lantech.com

Q-300XT

**Eliminate the "run-around" with Simple Automation™
in a fast - paced environment.**

Q-300XT automatically attaches and cuts the film. Equipped with a fully protected mechanical cut & clamp. Improve productivity by keeping the operator on the forkluck.

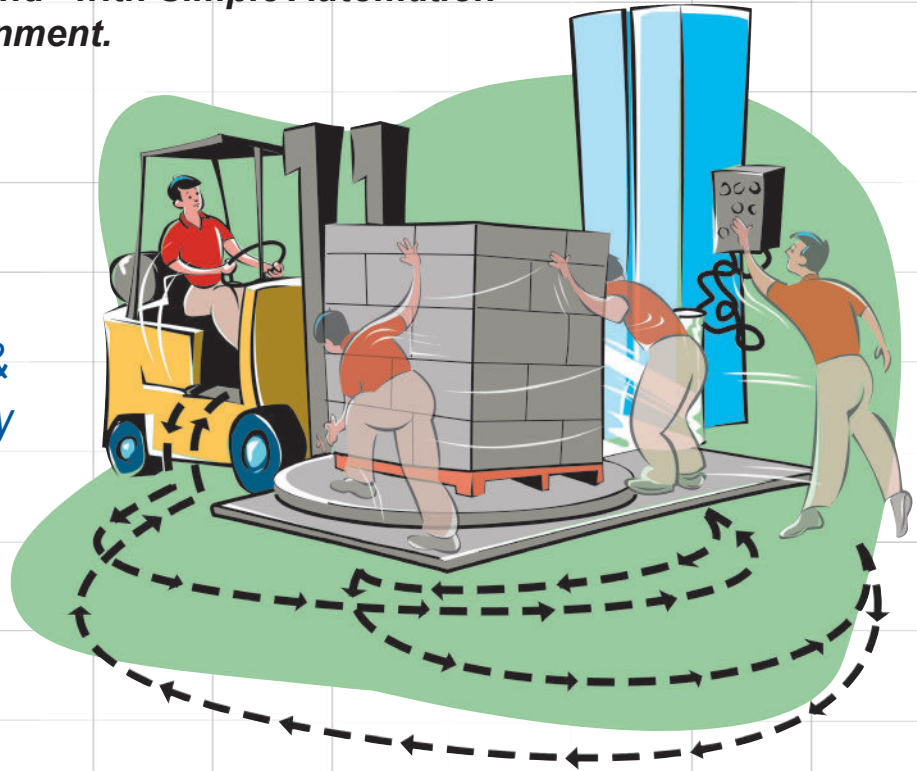

Q-300XT Specifications

PERFORMANCE CRITERIA

■ Production Speed based on 80" load height; 2 film layers and 12 revolutions	30-40 loads per hour
■ Maximum Load Diagonal	1752mm
■ Maximum Load Height	2032mm
■ Maximum Load Weight	1814 Kg

LOAD HANDLING SYSTEM

■ Turntable Drive	3/4 HP TEFC Motor
■ Turntable Speed	1-12 RPM
■ Turntable, Smooth Top	1651mm

FILM DELIVERY SYSTEM


■ Power-Roller Stretch® Plus System	200% Standard
■ Wrapping Force	Electronically controlled
■ Film Capacity	254mm Roll Dia, 508mm Web Width

MACHINE SHIPPING WEIGHT

■ Machine size	1701mm W x 3048mm L x 2362mm H
■ Shipping Weight (including skid - approximate)	748 Kg (excludes ramp)

ELECTRICAL REQUIREMENTS

■ Machine Voltage	115V, 20 Amp
■ Microcontroller	Standard
■ Wrap Cycle Pause	Standard

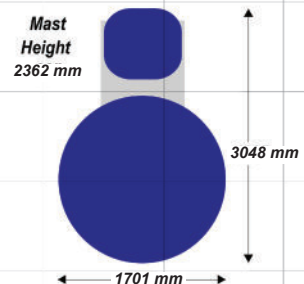

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2011

