

# Lantech.com

## S-300XT

Simple Automation™  
Stretch Wrapping System

Productivity

Providing creative  
solutions to help  
customers increase  
productivity.

### Product Applications

- Light Loads
- High Volume
- Heavy Loads
- Tall Unstable Loads



### Create Your Own System

Configure and price  
a stretch wrapper at  
[www.lantech.com](http://www.lantech.com).



### Simple Automation™

- No operator involvement
- No getting on and off the forkluck
- No bending to attach and cut the film
- No pneumatic hookups, with 240V for easy installation



Go on  
Figure

# S-300XT

## Eliminate the "Run Around" with Simple Automation™

Simple Automation™ on our new S-300XT Stretch Wrap System automatically attaches and cuts the film...so your forklift operator will spend more time behind the wheel.



## S-300XT Specifications

### PERFORMANCE CRITERIA

- Production Speed based on 200 cm load height; 2 film layers and 12 revolutions 30-40 loads per hour
- Maximum Load Diagonal 200 cm.
- Maximum Load Height 200 cm.

### LOAD HANDLING SYSTEM

- Wrap Arm Speed 1-12 RPM
- Wrap Zone Size 230 cm diameter

### FILM DELIVERY SYSTEM

- Power Roller-Stretch® 200% Stretch (Standard)

### MACHINE SHIPPING WEIGHT

- Shipping Weight (including skid - approximate) 1750 kg


### OTHER INFORMATION

- Machine Size 398 x 365 x 307 cm.
- Operating Space 436 x 398 x 345 cm.
- Shipping Weight 1.540 kg.

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2002

\* Maximum wrap height may vary based on film force, neckdown, and roll carriage travel speed.

307 cm  
Height

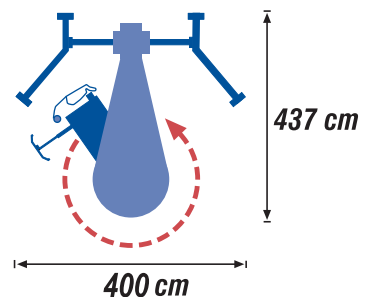

MEMBER  
PMMI